



HIGH LEVEL SECURITY

BOON EDAM
YOUR ENTRY EXPERTS.

TOURLOCK 180.

THE **HIGH THROUGHPUT FLEXIBLE** SECURITY REVOLVING DOOR



The Tourlock 180 security revolving door is the ideal solution when you need to solve the combination of high security and high traffic flow. By offering various operating functions, ranging from standard "revolving-mode" up to "high-security mode", the Tourlock 180 delivers a flexible entrance that can be adapted to the changing demands within a 24-hour operation cycle. The door easily integrates with an access control system, and due to its four-wing design and working principle, prevents unauthorised entry into facilities, therefore protecting people and assets.



OVERVIEW

This technologically advanced door allows bi-directional traffic, which allows authorised users to enter and leave a building at the same time. Authorisation via a signal from an access solution control system, such as a card reader or biometrics device, sends a signal and on acceptance only – the door will begin to rotate. This high security door is so reliable at preventing tailgating and piggybacking that it does not even require guard supervision - creating a return on investment in a short one to two years.

TAKING SAFETY AND SECURITY SERIOUSLY

The Tourlock 180 meets the latest CE safety regulations to allow for a trusted and convenient passage, even for untrained users in public locations. In compliance with the European EN17352 user safety level, the door also includes:

- **Block detection** sensing obstacles in the door
- Optional highly accurate **end wall buffer (EBS) safety sensors** with adjustable detection width to safeguard the main closing edge
- **Safety rail door wing (SRD) buffers** to protect heels and toes
- **Safety rail turning (SRT) at the leading-edge buffers** to protect hands and fingers
- **Contrasting instructional safety stickers** on door wings
- Optional **Emergency stop button** to switch off and unlock the drive instantly, without any security compromise
- **Pull release with a lock** to release the door set in case of power failure

ADVANCED TIME OF FLIGHT (TOF) DETECTION AND ANALYSIS

The Tourlock 180 is floor mounted and comes with an array of possible security packages ranging from tailgating detection up to piggybacking detection. For those looking for the highest level of security, the most sophisticated available option is an overhead sensor system – called StereoVision. The technology is integrated into the ceiling of the Tourlock 180. Capable of determining whether one or more persons are attempting to enter the secure area.

Using Boon Edam's analysis tool, data can be used to optimise the performance of the door. Trained technical specialists can evaluate user mix and unique behaviours to optimise the security settings to find the right balance of security, throughput and safety.

MORE FLEXIBILITY MEANS MORE CHOICE AND CONVENIENCE

The multi-functional operation modes available in the Tourlock 180, really make it easy to adjust the door to suit all your circumstances as they evolve over the day. This key-switch flexibility makes it suitable for both trained users or for use in more public locations. The following modes can be set:

- **High security** - piggybacking and tailgating detection
- **Medium security** - tailgating detection
- **Revolving** - access for all

COPES WITH BUSY AREAS

With the global population on the rise and the trend for skyscrapers growing – it is important to have a security revolving door that can cope with a high volume of people entering and exiting. The Tourlock 180 offers automated, simultaneous bi-directional traffic and can allow for up to 18 users to pass through the door (in each direction) per minute. The door comes delivered in a fail-safe mode with an option to be made fail-secure – this maintains the security in the event of a power failure. It also comes with an optional collapsible doorset to create a free passage, in case of emergency upon a signal from the building management system.

TOUCHLESS OPTIONS FOR A NEW WORLD

Using the latest biometric authentication systems creates a complete touchless and frictionless entry. There is no reason to reach out to your authorisation card or tag. Knowing who is in your building, as well as how many people are there at one time, has become paramount in the changing world we are in today - where reducing over-crowding is top-of-mind for every security and facility manager.

EXTERNAL CONTROL

The Tourlock 180 can be controlled and monitored via a contemporary touchscreen panel or, for more advanced controlling, be integrated with the ACS system. Flexible integration opportunities are available to make sure your high security door is set up to suit your exact location's security criteria. Our entry experts are trained to assist you further with this.

KEY FEATURES

- Multi-functional operational modes
- Supports simultaneous bi-directional traffic
- Prevents tailgating
- Optional StereoVision anti-piggybacking system
- Seamless integration with access control and biometric devices (including facial recognition)
- Advanced Resilience:
 - Burglar-Resistance Protection Package (RC3)
 - Bullet-Resistance Protection Package (BR4NS)
- Onboard user communication system


KEY BENEFITS

- Reduced / eliminated guard salary allows for quick ROI
- Handles high throughput (2 x 18 per minute)
- Accelerated technical troubleshooting and automation for increased reliability
- Effectively accommodates traffic levels
- Self-managed – no manned guard required

SUGGESTED SEGMENTS

- Financial
- Technology
- Data centres
- Petrochemical
- Government / military
- Office Buildings
- Airports

You can level up in any of these categories:

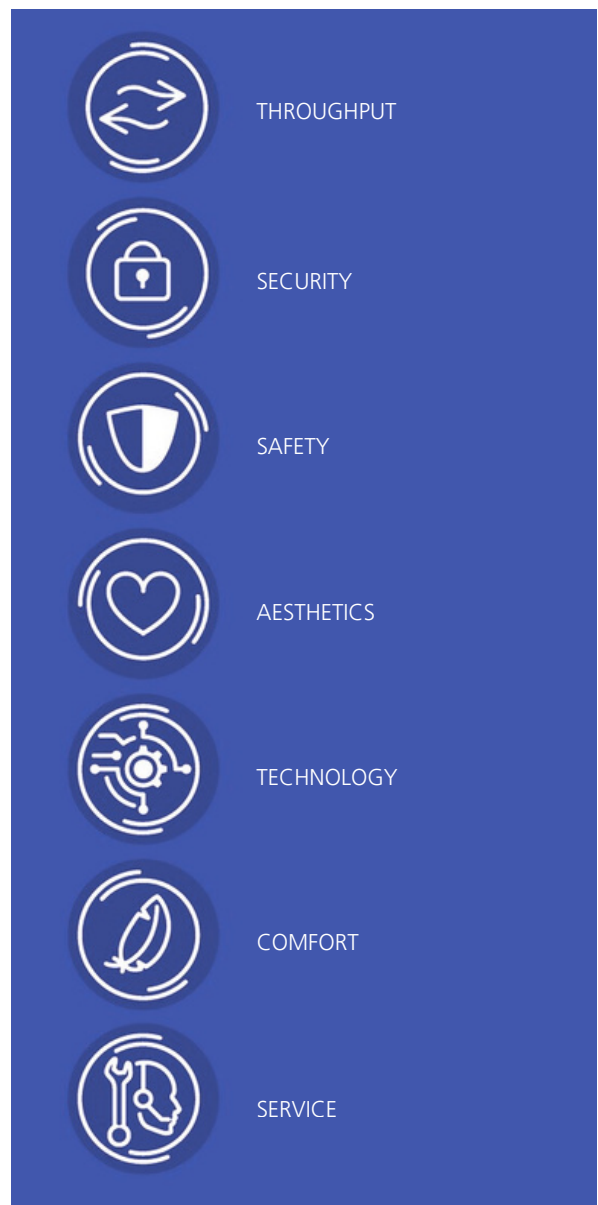

LEVEL UP



If our standard specifications do not quite suit your needs, we open up opportunities for you to 'Level Up' where it counts most. You can also do this according to your most motivating value driver.

The specification table shows you our standard product options, and to the right of these, you can easily see, and consider, any compatible 'Level Up' options for fine-tuning the Tourlock 180.



**Showing model with optional features.*

TECHNICAL SPECIFICATIONS



THROUGHPUT

MOST POPULAR

VARIATIONS

Throughput	18 People / minute in each direction	
Diameter	1800 mm	1600-2200 mm in increments of 200 mm
Height	2200 mm	2100 - 2600 mm in increments of 100 mm
Canopy Height	200 mm	200 - 600 mm in increments of 100 mm
Throat Opening	1191 mm	1048, 1332, 1474 mm
Number of Doors / Wings	4	
Flow	Bi-directional, simultaneously	



SECURITY

MOST POPULAR

VARIATIONS

Tailgating Detection	Overhead sensor system	-
Piggybacking Detection*	Weight system One-way detection (on entry)	StereoVision Two-way detection (entry and exit)
Biometric Authorisation	-	Facial recognition system
Night Locking	-	Mechanical lock on doorset Night locking doors



SAFETY

MOST POPULAR

VARIATIONS

User safety	SRB, SRD, SRT safety buffers	Emergency stop button, EBS safety sensor Collapsible doorset for escape routing
Operation in case of power failure	Fail safe	Fail secure - Pull release to unlock doorset from secure side
Operation in case of Fire Alarm	Configurable to release the Tourlock brake	
Protection Packages	Vandal resistant safety glass (P2A)	Burglar resistant RC3 package Bullet resistant package with BR4NS glass



AESTHETICS

MOST POPULAR

VARIATIONS

Material	Power Coated Aluminium	Anodizing, stainless steel, brass
Glass Panels	Glass decals	Tinted and low iron glass options
Wrapping / Branding	-	Glass decals with logo



TECHNOLOGY

MOST POPULAR

VARIATIONS

Power Supply	110 - 240 V, 50 - 60 Hz	INTEGRATION OPPORTUNITIES: - BoonTouch external control panel - Card and tag readers - Mobile / Bluetooth readers - Facial and iris recognition - Touchless fingerprint and vein readers - Free-out sensor activation
Operating Power	100W	
Operating Temperature	-15°C to +50°C	
Weight	900 kg	
Access Control	I/O Dry contacts for virtually any access control system	
		Card reader mount




COMFORT

MOST POPULAR


VARIATIONS

Lighting and Sound	4x LED ceiling lights	Voice module Customised lighting possible
Operating Modes	Cleaning mode	Revolving mode and medium/high security mode switch

WORKING PRINCIPLE

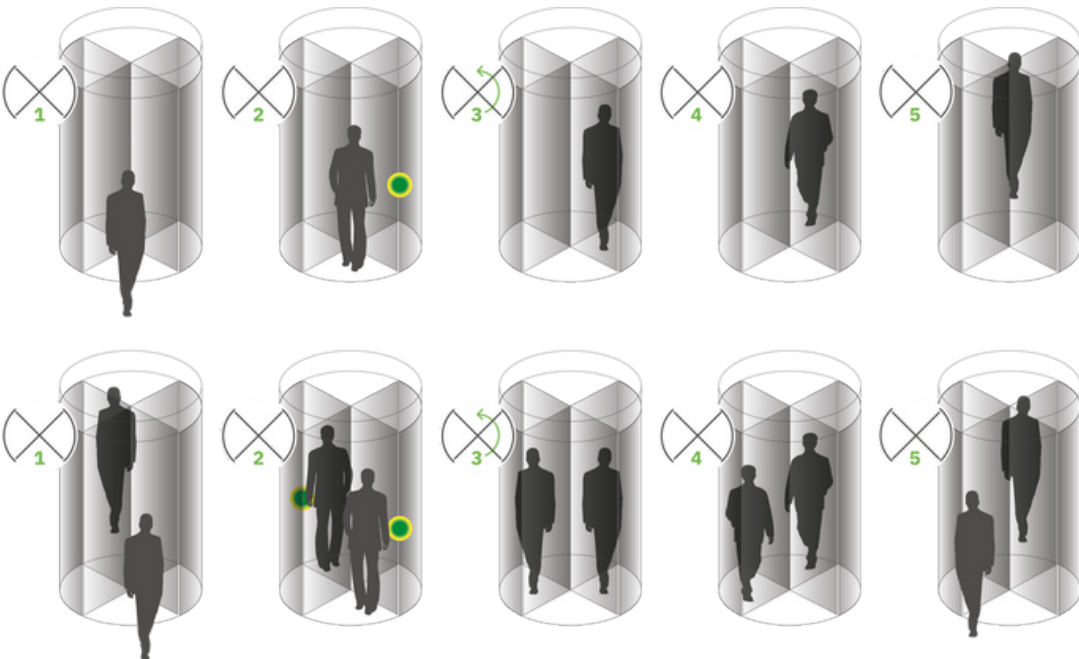

TECHNICAL DIMENSIONS

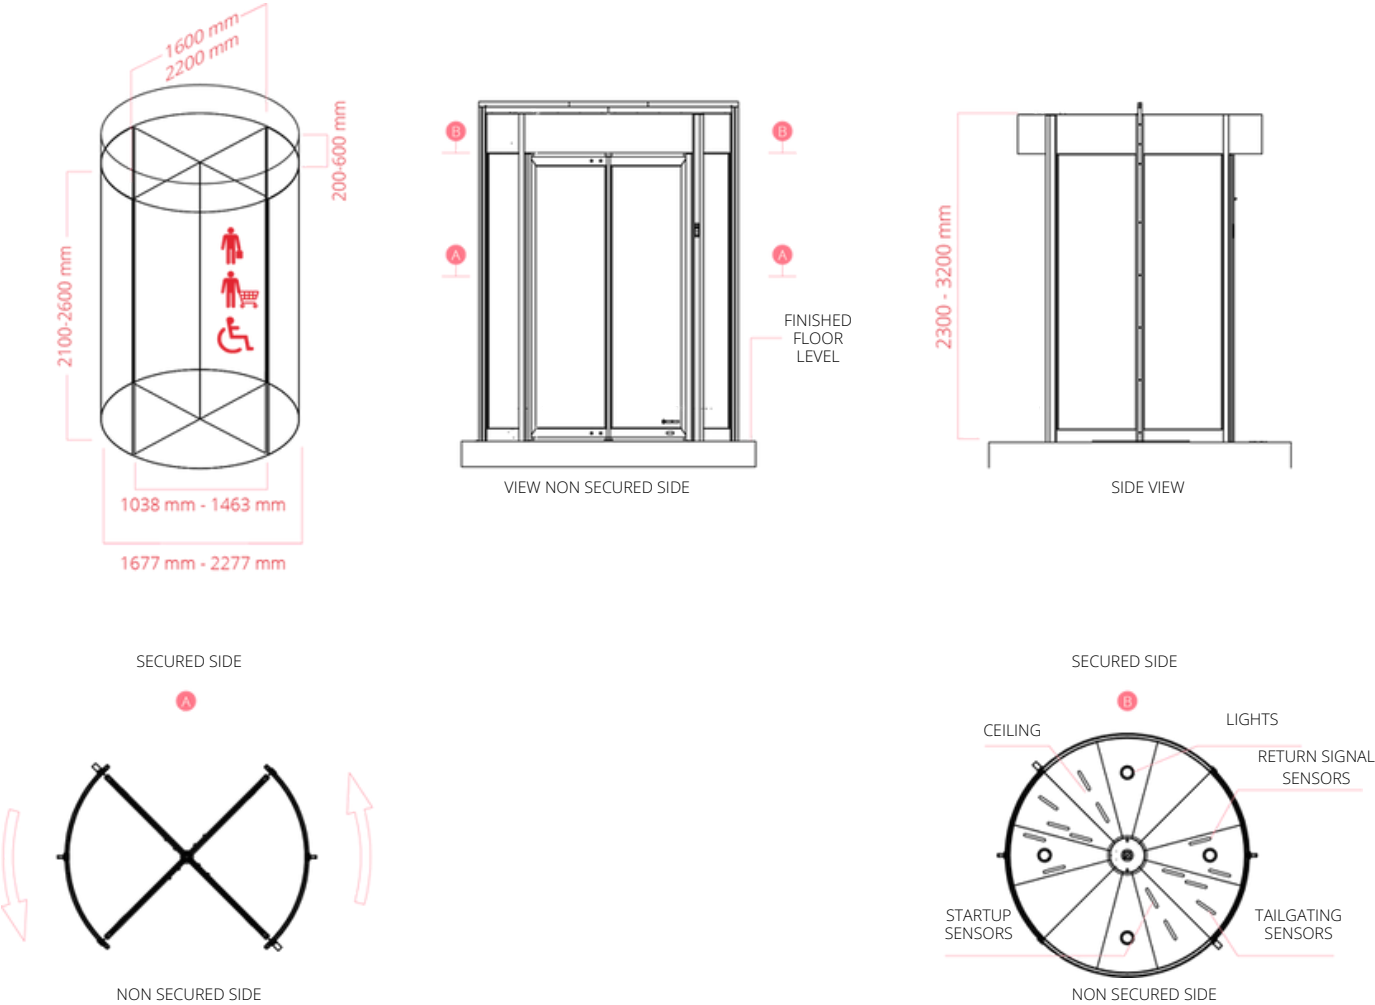



SERVICE AND MAINTENANCE

With hundreds of thousands of visitors passing through the entrance every day, uninterrupted and reliable operation is vital. Regular service and maintenance can prevent unexpected equipment failures. Monador's service and maintenance teams across Türkiye and neighboring countries have extensive experience with how local conditions affect the wear and tear of your entrance solutions. They offer customized service and maintenance contracts perfectly tailored to these conditions.

COMPLIANCE

Monador security entrances are trusted solutions that allow organisations to meet compliance regulations related to restricting access to areas within a building. We take compliance and safety very seriously and ensure that our products are manufactured, installed and maintained to keep up the strict criteria required in all our countries. We are always improving and committed to making sure our products are compliant and certified.

The Tourlock 180 complies with the following European Directives and Standards:

- Machine Directive 2006/42/EU
- EMC Directive 2014/30/EU
- RoHS Directive 2011/65/EU
- EN17352 - Safety functional and mechanical
- EN1627 – Burglar resistant package
- EN1063 – Bullet resistant package
- EN356 – Glass specification

CLIMATIZATION

The process of adjusting the temperature, humidity, cleanliness and air movement of a closed environment according to human health and comfort is called air conditioning. We know that our automatic door models, which combine advanced technology with research on human behavior and building environment, will contribute to sustainable and healthy buildings. With smart sensors, adaptive operating modes and connectivity, we can ensure that every building makes a difference and contributes to the future of green buildings.



EXPERIENCE AND KNOWLEDGE

Monador Automatic Door Systems Trade Inc. is the leading organisation that laid the foundations of the sector. With this understanding, we are proud to continue to provide the service of automatic sliding, magnetic sliding, revolving, security system doors, which we have been implementing in Turkey and the Middle East since 1988. As a result of the experience and knowledge we have gained, with our professional teams, we provide 24/7 service to our customers after sales or after assembly. Our products with superior technological equipment are provided to provide trouble-free service.

SERVICE & MAINTENANCE SUPPORT

Our periodic maintenance packages are **Platinum**, **Gold** and **Silver** presented in three categories.

✉ info@monador.com.tr

☎ 0212 216 98 18

✉ servis@monador.com.tr

☎ 0212 211 9 211 (In Business Hours)

☎ 0532 465 55 06 - 0532 465 55 07 (Other)



www.monador.com.tr



monador otomatik kapı



monadorotomatikkapi



monador otomatik kapı



TS-EN-16005

